




Front View

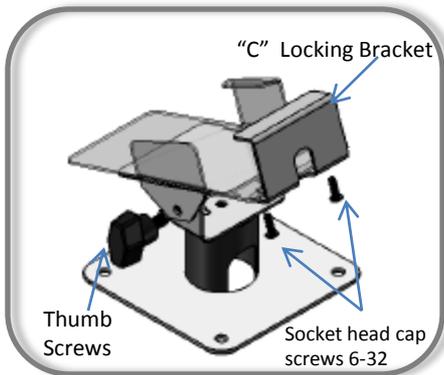

Basic Overview

Note: Images are not to scale.

2" Height Stand  
P/N:225758404



Back View



**INSTALLATION**

1. Remove stand from packaging box. Firmly secure the base pole by bolting four (4) screws through the base plate to a flat counter surface.
2. Remove the socket head cap screws from the "C" Locking Bracket using the Allen Wrench provided in the kit.
3. Mount payment terminal to stand by gliding it in place until side walls of the stand are snug with terminal.
4. Secure the terminal by replacing and tightening the "C" Locking Bracket located in the back of the stand using the Allen Wrench provided in the kit.
5. Secure the stand's tilt adjustment by tightening the two side thumb screws on the mounting plate on each side of the stand.
6. Guide cable connections down and out through the bottom opening.
7. Make cable connections as needed.

Replacement Parts



Thumb Screw  
P/N: 225-76140-04

**TOOLS AND HARDWARE REQUIRED**

- One (1) Allen Wrench is included with kit to adjust the Socket head cap screws (6-32) for the "C" locking bracket.
- NO other hardware or tools are included for mounting stands to a surface. Hardware will need to suit your specific desktop or platform thickness.
- Phillips Head Screwdriver or power drill will be required to mount stand to surface (if necessary).

**SPECS**

- Rotation:** 180° around display pole
- Height:** 2" inch high pole (+/- 3.5") or counter height (+/- 2.5")
- Tilt Adjustment:** +/-45° Pole
- Diameter:** 2" inches (Base)
- Construction:** Steel
- Finish:** Textured powder coat
- Maximum Load:** Designed for Ingenico Hand Held i3070/Moneris foot print.
- Cable Management:** Designed with openings for easy and convenient cable access and routing.
- Color:** Black