


Annunciator Module

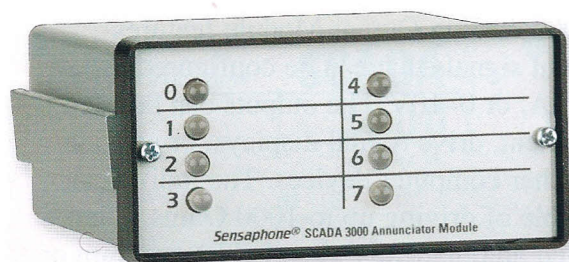

Description

The SCADA 3000 Annunciator Module provides 8 programmable LED indicators to display the status of assigned I/O points. The LEDs are bi-color (red/amber), which means that each LED is always on, thereby preventing a false reading due to a burned-out LED. Red indicates an active or ON condition and Amber indicates an inactive or OFF condition. The Annunciator LEDs appear as two-state (ON/OFF) outputs in the SCADA 3000 software. The Annunciator module is housed in a 1/8 DIN enclosure for convenient panel mounting.

Package Contents

- (1) SCADA 3000 Annunciator Module
- (1) Mounting Hardware

Specifications

Programmable LED Indicators:
8

Network Data Rate:
153.6 Kbps

Bus Termination Impedance:
120 Ohms

Power Requirements:
10-15VDC 100mA (typical)
1.5W (typical)

Operating Temperature:
0° to 70°C (32° to 158°F)

Humidity
5 to 90% non-condensing

Dimensions:
3.8" x 1.85" x 5.6"

Weight:
.75lbs

Enclosure:
1/8 DIN aluminum housing with locking side panels for panel installation

Description

Part Number

SCADA 3000 Annunciator Module	FGD-3060
---	----------