

Superior Reliability

The KB1700, one of the most popular "bump bars" on the market today, is built to withstand the most demanding requirements of kitchen systems and other industrial applications. The keypad is built with high quality stainless steel dome disk switches that last more than 3 million cycles, and the unit is enclosed in special, high durability plastic that is UV-resistant and prevents color fading. All units also receive full functional and quality control testing before leaving Logic Controls facilities.

Easy and Advanced Programming

The KB1700 is one of the easiest and most programmable bump bars on the market. It is fully downward compatible with the IBM bump bar. All 17 tactile keys are programmable and the KB1700 supports a full set of alphanumeric, control, function, and international output codes. Using a powerful Windows-based programming utility that stores key definitions in a data file, an integrator can create a program layout for multiple keypads, rather than programming key by key, keypad by keypad.

Multitude of Interfaces

The KB1700 I/O ports allow daisy-chaining of other input devices. It provides either a PS/2 or RS232C output and supports a true keyboard wedge function, operating with or without a computer keyboard. The KB1700 also offers an internal beeper and comes with various legend sheet options.

FEATURES

- Fully downward compatible with the IBM bump bar
- All 17 tactile keys are programmable, up to 1800 characters per key with programmable inter-string delays
- Includes powerful Windows-based programming utility
- Create program layout for multiple keypads ?programming utility saves templates in data files
- No programming accessory kit, TSR program, or battery required
- High quality, stainless steel dome disk switches last more than 3 million cycles
- Standard computer 101 keyboard output data format
- Data set includes all alphanumeric, control, function and optional international output codes
- True keyboard wedge function, operates with or without computer keyboard
- Available with PS/2 or RS232C output
- I/O ports allow daisy-chaining of other input devices
- Internal beeper
- Various legend sheet options available

Specifications

MECHANICAL

Weight without bracket	0.7 lbs.
Weight with bracket	1.4 lbs.
Dimensions without bracket	(in inches)
Width x Height x Depth	9.25 x 3.50 x 1.13
Dimensions with bracket	(in inches)
Width x Height x Depth	9.25 x 2.86 x 4.00
Keys	Stainless steel dome disks
Life cycle	> 5 million tactile operations

ELECTRICAL

Input voltage	+5VDC
Current	20 ma.

ENVIRONMENTAL

Operating Temperature	0 to +50C
Storage Temperature	-20 to +70C
Relative Humidity	
Operating	85% max. non-condensing
Non-operating	90% max. non-condensing
Vibration (10 to 55 Hz.)	4 G's
Shock	40 G's

INTERFACE


Keyboard emulation	Standard
RS232C (KB1701)	
Baud rate	9600
Parity	None
Data bit	8

MODELS


Model	Description
KB1700	17 Key Programmable Keypad w/Wedge Interface, AT Cables Mounting Bracket, Manual, Utility Software
KB1700J	KB1700 17 Key Programmable Keypad use in conjunction with LS3000. Includes Wedge Interface, RJ11-RJ11 cable, Mounting Bracket, Manual, Utility Software
KB1700P	17 Key Programmable Keypad w/Wedge Interface, P/S2 Cables, Mounting Bracket, Manual, Utility Software
KB1701	17 Key Programmable Keypad w/RS232 Interface, Serial Interface cable, PS/2 Cables, Power Adapter, Mounting Bracket, Manual, Utility Software

Keypad Legend Sheet Samples


Option A
(IBM Bump Bar Compatible Layout)

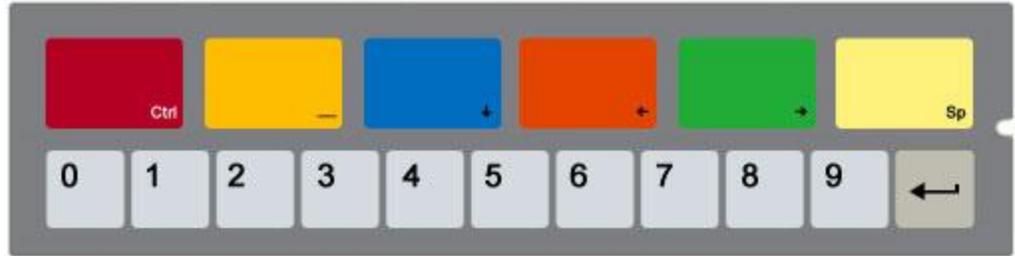


Option B
(Progressive Software Compatible Layout)

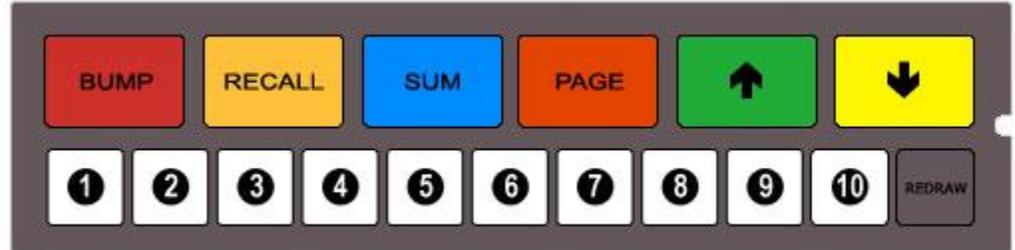


Option C

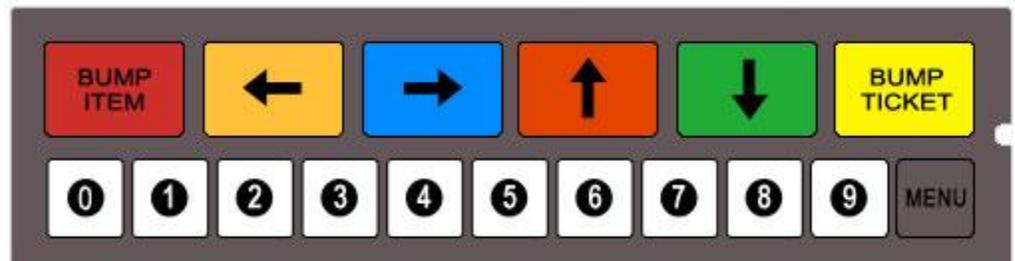


Option D
(Positouch Compatible Layout - KB1700PH)

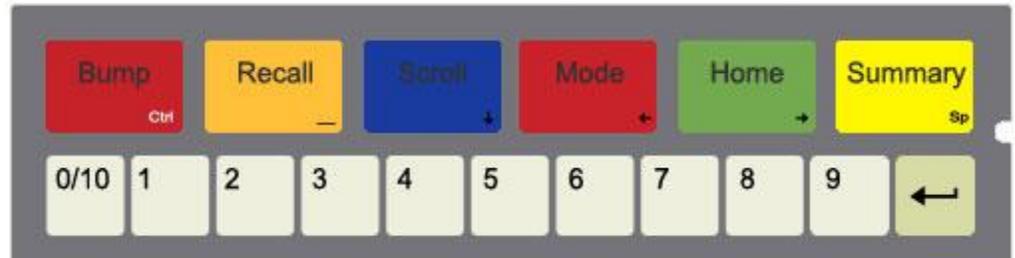


Option E
(Exit41 Compatible Layout)

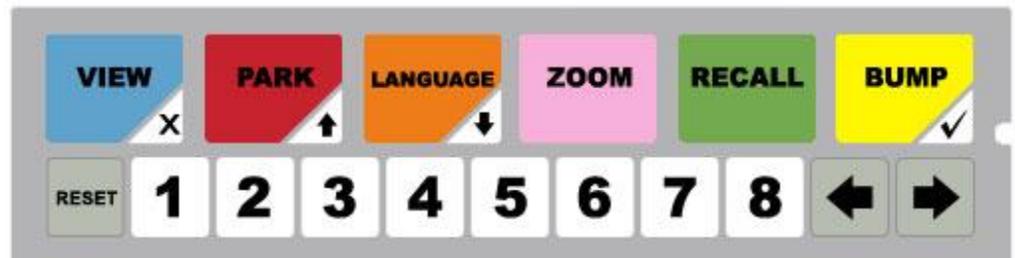


Option F

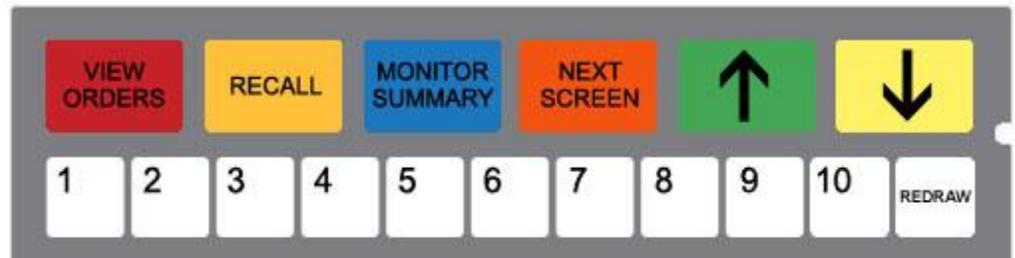

Option G

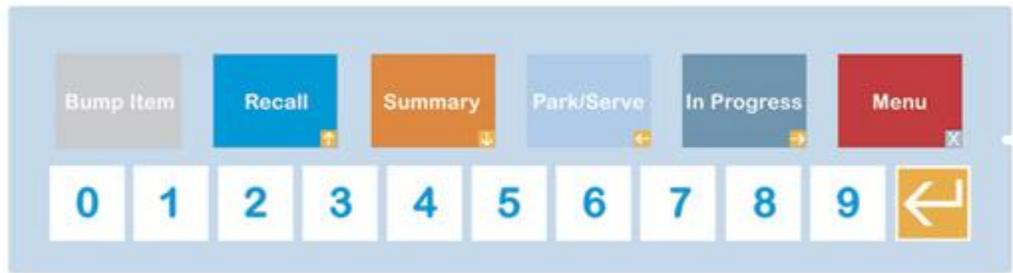

Option IN

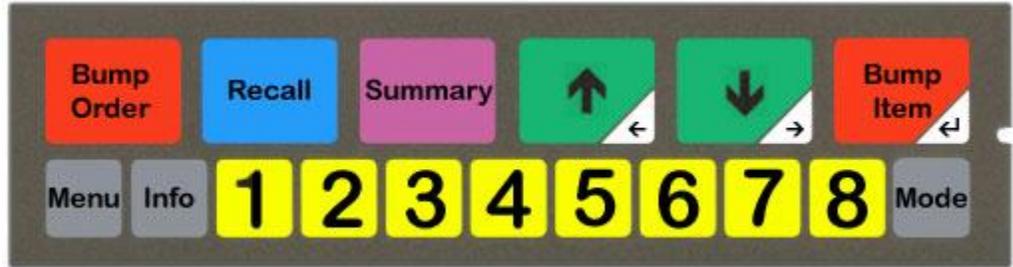

Option K

