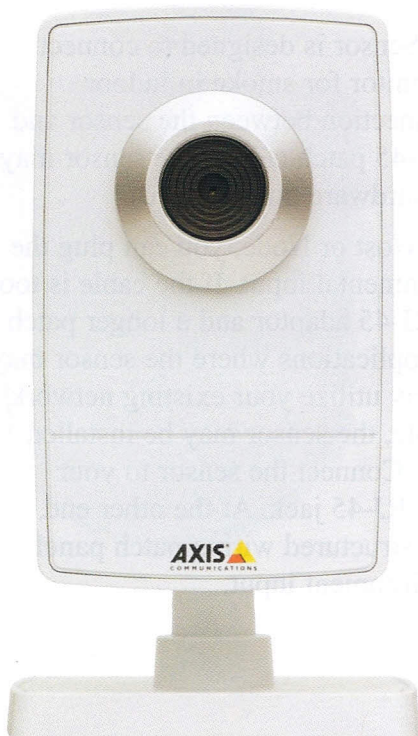# Axis M1011 Camera

Description

The Axis M1011 is a small network camera ideal for monitoring your small business property, data center, or residence. The camera can be used in combination with the IMS-1000 or IMS-4000 systems to send camera snapshots via e-mail when alarms are detected.

The camera offers a high quality yet affordable video surveillance solution. Using progressive scan technology, the camera provides VGA images of moving objects without motion blur.

Designed to compliment modern interiors and easy to install and use, the M1011 will not look out of place in the home or office and is ideal for IP camera novices. The Axis M1011 IP security camera has a built-in web server and can be viewed over a Local Area Network (LAN), Wide Area Network (WAN) or via the Internet as a streaming IP webcam.

Specifications

Package Contents
(1) Axis camera

(1) Power supply

(1) Camera stand and clamp

(1) Installation guide and manual

Image Sensor:
¼" Progressive scan RGB VGA CMOS

Lens:
4.4mm, f/2.0, fixed iris, fixed focus, 47° horizontal angle of view

Minimum Illumination:
1 lux, F2.0

Resolutions:
640x480 to 160x120

Connectors:
RJ-45 10BASE-T/100BASE-TX Auto MDIX

Operating Conditions:
32° to 122°F (0° to 50°C)
20 to 80% RH (non-condensing)

Power Supply:
5VDC AC Adapter, 7.5W

Compatibility:
IMS-1000, IMS-4000

Specifications subject to change without notice

Axis M1011 Camera IMS-4423