


Magellan® 9500

Dual Antennae Integrated Sensormatic® Ultra•Max® EAS Deactivation

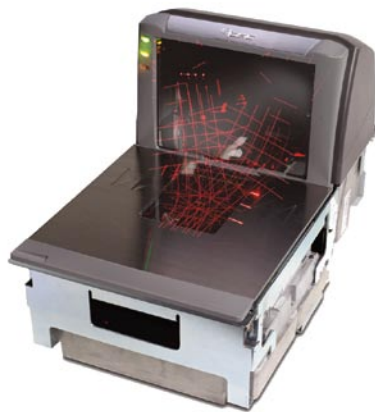

Features:

- OmegaTek™ Productivity Technology
- Datalogic Scanning SmartSentry® firmware interfaces with the Sensormatic® Ultra•Max® Electronic Article Surveillance Deactivation
- Dual EAS Antennas in the Vertical and Horizontal plane (models 9503 and 9504)
- SurroundScan® 3D Scanning™ Technology
- Enhanced All-Weights® scale platter
- Flash ROM for easy, low cost software upgrades
- Multiple POS interfaces support all popular host systems
- FirstStrike® Advanced Decoding Software
- Powered auxiliary RS-232 port for handheld scanner
- Sunrise 2005 and GTIN compliant
- Value Added Software Features:
 - ◊ Host Download
 - ◊ Diagnostics Reporting
 - ◊ Productivity Index Reporting™ (PIR)
 - ◊ Cashier Training™ / Ergonomic Index

Mechanical

Dimensions

Length

Model 9502 (scanner/scale): 20.0 in / 50.8 cm
 Model 9501 (scanner): 20.0 in / 50.8 cm
 Model 9503 (scanner): 20.0 in / 50.8 cm
 Model 9504 (scanner/scale): 20.0 in / 50.8 cm

Width:

11.5 in / 29.2 cm

Depth (below counter): 6.5 in / 16.5 cm

Height (above counter): 7.0 in / 17.8 cm

Weight

Model 9502 (scanner/scale): 28.9 lb / 13.1 kg
 Model 9501 (scanner): 22.2 lb / 10.07 kg
 Model 9503 (scanner): 24.2 lb / 10.9 kg
 Model 9504 (scanner/scale): 32.9 lb / 14.9 kg

Scale Capacities

Capacity: 30.0 lb / 999 kg or 15 kg (interface dependent)

Minimum Increment: .01 lb / 0.005 kg

Vibration Immunity: 4 programmable filter settings

Maximum Static Weight: 150 lb / 68 kg

Adjustments Required: Calibration only

Decoding Capability

The Magellan® 9500 decodes and autodiscriminates all of the following symbologies:

- UPC Versions A & E
- UPC Supplementals (Bookland & Coupon Code)
- UPC Add-ons (sub 2 or P2, sub 5 or P5 and CI28)
- GSI DataBar™ (Omnidirectional, Expanded and Stacked)
- EAN 8, 13
- JAN 8, 13
- EAN/JAN two label
- UCC/EAN 128
- Code 39 (with full ASCII)
- Code 128
- Code 93
- Interleaved 2 of 5
- Italian Pharmacode
- Codabar/NW7
- MSI Plessey

Data Sheet

Optical

Scan Lines: 64

Motor Speed: 6,000 rpm

Scan Rate: 6,400 lines/sec.

Scan Zone: 360° x 2

Sides Read: 6

Read Height: 5.5 in / 13.9 cm

Environmental

Temperature Rating:

Operating: 50 to 104 °F / 10 to 40 °C

Storage/Transport: -40 to 158 °F / -40 to 70 °C

Humidity: 5 to 95% NC

Electrical

AC Power Requirements:

Nominal: 100-250 VAC, 50-60 Hz; 9 Watts

Sleep Mode: 17 Watts (maximum) 4 Watts

Communications

Host: All Magellan® 9500 models support IBM RS-485, RS-232, IBM USB and Keyboard Wedge (scanner only)

Other: RS-232 handheld scanner port; scale host port; remote scale display port; Sensormatic EAS controller port

Safety & Regulatory

Electrical: UL 60950; CSA 60950; EN60950

Emissions: FCC part 15 subpart j, Class B (USA); AS/NZS 3548 (Australia/New Zealand); ICES-0003 (Canada); VCCI; EN 55022; CISPR 22 and others.

Laser Safety: Class IIa Laser Product; IEC 60825 Class 1

(CAUTION: Laser Light – do not stare into beam)

Restriction of Hazardous Substances: Complies to EU RoHS



Weights & Measures: *Standards - HB44, EN45501, 90/384/EEC, NOM, and others.

* Countries approved: USA, Canada, Mexico, Europe, and most of the world.

* Contact your Datalogic Scanning representative for certification schedule and additional listings.



DATALOGIC™

Datalogic Scanning, Inc.

E-mail us at: scanning@datalogic.com

www.scanning.datalogic.com



Copyright © Datalogic Scanning, Inc. 2005-2008. All rights reserved. Protected to the fullest extent under U.S. and international laws. Copying, or altering of this document is prohibited without express written consent from Datalogic Scanning, Inc. • Datalogic Scanning, Inc. of Eugene, Oregon, USA is ISO registered by NQA. • The Datalogic logo is a trademark of Datalogic S.p.A. • Magellan, All Weights®, SurroundScan and FirstStrike are registered trademarks of Datalogic Scanning, Inc. • OmegaTek, 3D Scanning, Productivity Index Reporting (PIR), and Cashier Training are trademarks of Datalogic Scanning, Inc. • All other brand and product names are trademarks of their respective owners. • Additional information concerning this product or other Datalogic products and services can be found at the Datalogic web site: www.scanning.datalogic.com. • Product specifications are subject to change without notice.

R40-0084-US K 0508